

Inserting elements using WordApplication



We recommend that you read about [Word file representation in WordApplication](#) before reading this article.

How WordApplication inserts elements

Each of the elements listed in the document tree structure inherit from the [Element](#) class, which provides most of the methods for inserting new elements into a document. [WordApplication](#) will allow you to call any Insert method on almost any type of element, but the behavior of that method will change depending on what type of element the method is called on and what type of element the method is inserting

For example:

- Inserting a new [Section](#) automatically inserts a new [Paragraph](#) and [CharacterRun](#) within that [Section](#).
- Inserting a new [Paragraph](#) automatically inserts a new [CharacterRun](#) within that [Paragraph](#).

To further illustrate this point, we will examine calling [InsertTextAfter](#) on a [Section](#):

Example: Calling InsertCharacterRunAfter on a Section

This example shows the behavior of [WordWriter](#) when inserting an element two levels deeper than the current element.

A [CharacterRun](#) must be the child of a [Paragraph](#), but [InsertTextAfter](#) can be called on a [Section](#). In this case, a new [CharacterRun](#) will be inserted at the end of the last [Paragraph](#) in the [Section](#).

```
//--- doc is a Document object
Section sec = doc.Sections[0];
sec.InsertTextAfter(" New text.",
true);
```

```
'--- doc is a Document object
Dim sec As Section = doc.Sections(0)
sec.InsertTextAfter(" New text.",
True)
```


To achieve the most predictable behavior, it is recommended practice to call a Create or Insert method on an object appropriate to what is being inserted.

So, for example, instead of calling [InsertTextAfter](#) on a [Section](#) object as described above, it should be called on a [Paragraph](#), [ListEntry](#), or [Field](#) contents.

```
//--- doc is a Document object
Section sec = doc.Sections[0];
Element[] paragraphs =
sec.get_Elements(Element.Type.Paragraph
);
Paragraph lastParagraph =
(Paragraph)paragraphs[paragraphs.Length
- 1];
lastParagraph.InsertTextAfter(" New
text.", true);
```

```
'--- doc is a Document object
Dim sec As Section = doc.Sections(0)
Dim paragraphs As Element[] =
sec.Elements(Element.Type.Paragraph)
Dim lastParagraph =
CType(paragraphs(paragraphs.Length -
1), Paragraph)
lastParagraph.InsertTextAfter(" New
text.", True)
```

Here is an example Word document before running either of the code samples above:

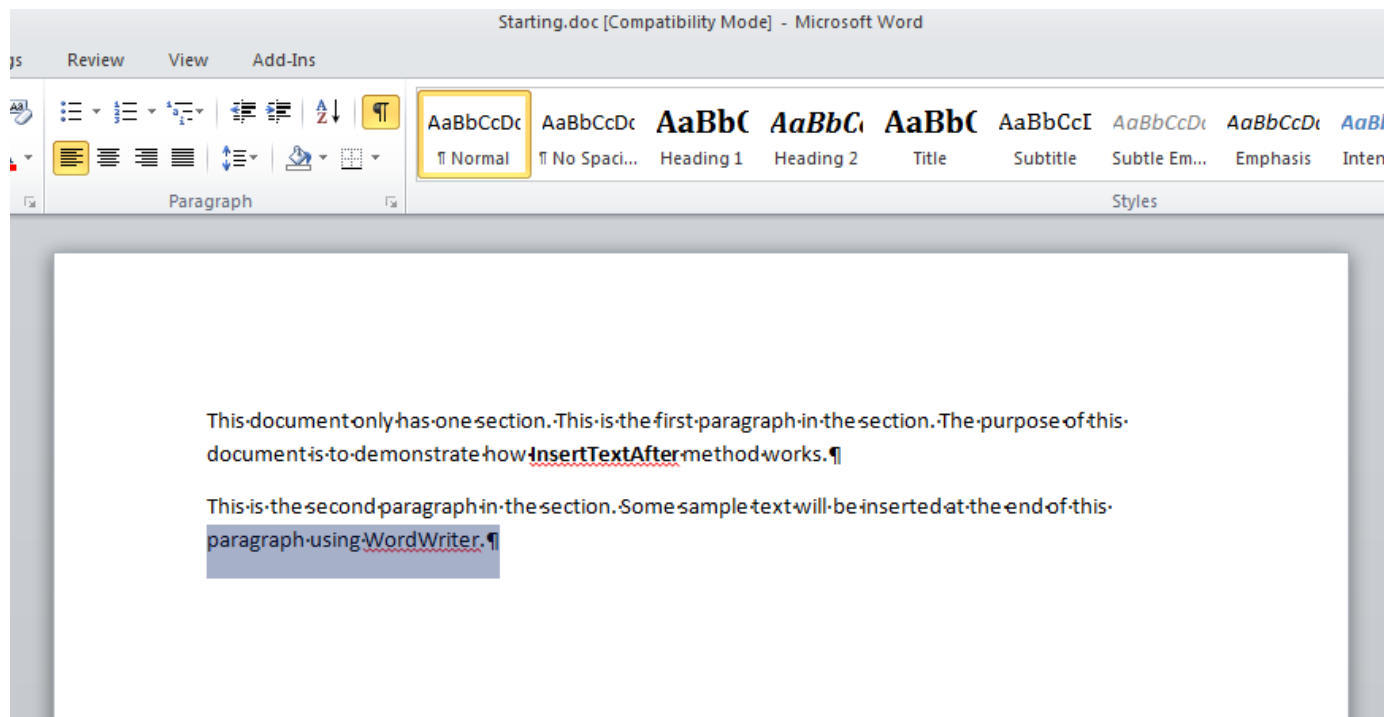

List of Insert Behaviors

The following table lists some common examples of how WordWriter behaves when a Create or Insert method is called on different elements.

Each column represents the following:

- **Parent element:** Element on which InsertXBefore or InsertXAfter is called.
- **Element to be inserted:** Type of element which is being inserted. Use the appropriate InsertXBefore or InsertXAfter for this type.
- **InsertXBefore Behavior:** What the InsertXBefore method does in this case.
- **InsertXAfter Behavior:** What the InsertXAfter method does in this case.

Notes:

- To insert a [Section](#), use [CreateSectionBefore](#) or [CreateSectionAfter](#).
- To insert a [CharacterRun](#), use [InsertTextBefore](#) or [InsertTextAfter](#).

Parent Element	Element to be inserted	InsertXBefore Behavior	InsertXAfter Behavior
Document	Section	New Section is inserted before existing Sections .	New [[Section]] is inserted after existing Sections .

Document	Paragraph, List, or Table	Element is inserted in the first Section of the Document before any existing elements in that Section .	Element is inserted in the last Section of the Document after any existing elements in that Section .
Document	CharacterRun, InlinelImage, Hyperlink, or MergeField	Element is inserted in the first element (Paragraph , List , or Table) of the first Section of the Document before any existing elements in that first element.	Element is inserted in the last element (Paragraph , List , or Table) of the last Section of the Document after any existing elements in that last element.
Section	Section	New Section is inserted before the current Section .	New Section is inserted after the current Section .
Section	CharacterRun , InlinelImage, Hyperlink, or MergeField	Element is inserted in the first element (Paragraph , List , or Table) of this Section of the Document before any existing elements in that first element.	Element is inserted in the last element (Paragraph , List , or Table) of this Section of the Document before any existing elements in that last element.
List	List	New List is inserted before the current List .	New List is inserted after the current List .
List	CharacterRun , InlinelImage, Hyperlink, or MergeField	Element is inserted in the first ListEntry of the List before any existing elements in that ListEntry .	Element is inserted in the last ListEntry of the List after any existing elements in that ListEntry .
Table	Table	Table is inserted in the first TableCell of the current Table before any existing elements in that TableCell .	There is currently an issue with this behavior. New rows are appended to the current Table in stead of being added to a new Table .
Table	Paragraph	Paragraph is inserted in the first TableCell of the current Table before any existing elements in that TableCell .	Paragraph is inserted after the Table .
Table	List	List is inserted before the Table . There is currently an issue with this behavior.	List is inserted after the Table and appears as a TableCell .
Table	CharacterRun , InlinelImage, Hyperlink, or MergeField	Element is inserted in the first element (Paragraph , List , or Table) of the first TableCell of the Table before any existing elements in that first element.	Element is inserted in the next element (Paragraph , List , or Table) after the Table , after any existing elements in that next element.